



T210 MINI

Police Reconnaissance UAV



Under
249g

Less than **249g**

Folding body, small design

Portable storage, unfold and fly,
Bring more surprises to the travel.



Anti-shake HD Camera

Three-axis mechanical stabilized pan tilt, equipped with 48 megapixel aerial camera, record up to 4k 30 frames of HD video, equipped with f/2.6 aperture, 83 ° ultra-low distortion wide angle lens, make your creation easy.

1/2.3inch

CMOS

48MP

Photo

4K 30fps

Video



One throw to fly

T210 MINI supports one throw to fly, which makes the takeoff scene unrestricted and increases the adaptability and travel pleasure of the UAV.



Intelligent voice somatosensory control

WK-V8 intelligent voice somatosensory control. Through voice delivery, you can get rid of two handed control, so that you can easily control various difficult flights and shooting, and bring different flight accompanying and easy travel experience.




Portable folding remote control

WKRC-H9 remote controller adopts folding design, mobile phone real-time operation, monitoring, double puller design, let you operate as you like.



Intelligent Speed Control

Intelligent cruise at a constant speed, automatically maintaining 3D movement and spin speed, bringing new ways to play with mirrors.

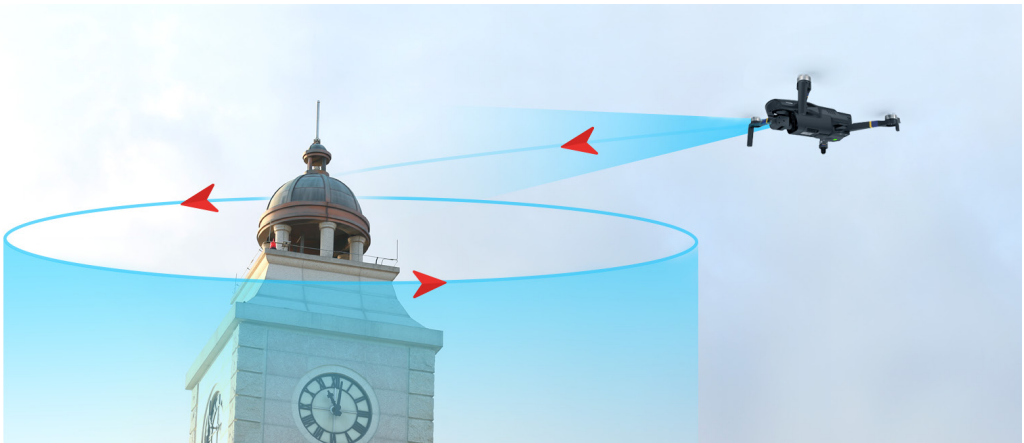

One-Key panoramic function

Flight control supports users to operate the one-key panorama shooting function in APP to enter the panorama shooting function. Flight control automatically adjusts the heading and pitch of gimbal , scans and takes multiple photos, and automatically splices them into panorama pictures.



Target management

Target point measurement, accurate positioning of the ground target's longitude and latitude, the gimbal can automatically track the target, assists in shooting the mirror, and can shoot large areas without operating the gimbal.



High-precision landing function

Flight control supports the use of two-dimensional code patterns to assist landing to improve landing accuracy and make landing error less than 10cm.





Specification

Aircraft	
Diagonal Length	241.6mm
Dimension (Length*Width*height)	167.4mm*217.8mm*57mm(Unfolded) 143mm*82.8mm*57mm(Folded)
Take-off Weight	249g
Max Ascent Speed	8m/s (adjusted)
Max Descent Speed	5m/s (adjusted)
Max Flight Speed (at sea level, no wind)	GPS mode: 5m/s Sports mode:12m/s (adjusted) Attitude mode: 25m/s (No wind environment)
Max Tilt Angle	GPS mode: 55° Sports mode: 55° Attitude mode: 55°
Max Service Ceiling Above Sea Level	4500m
Max Wind Speed Resistance	18m/s
Battery specifications	7.7V,2250mAh, LiPo 2S,10C
Max Flight time	30minutes(Sea level windless environment, 3m/s automatic cruise conditions)
Operating Temperature	-10℃ to+45℃
Hovering Accuracy Range	Horizontal: ±0.5m Vertical: ±1.5m (GPS Works)

Remote WKRC-H9	
Remote Size (Length*Width*Height)	173.82×106.75×72.62mm
Working frequency	2.4GHz
Maximum communication distance	5KM(Open, no shelter, no electromagnetic interference)
Battery	Built-in lithium battery 7.4V 2200mAh LiPo
Mobile device support	Suitable for tablets and mobile phones

Gimbal	
System of stabilization	3 Axes (pitch, yaw, roll)
Controllable rotation range	Pitch: -90° to 0°
Maximum control speed	Pitch: 30°/s
Angle control precision	Static: ±0.01° Dynamic: ±0.02° Stabilization: ±0.01°

Camera	
Image sensor	1/2.26-inch sensor CMOS 48MP JPEG photos
The lens	FOV83° 4.49mm Aperture: f/2.6
ISO range	100-1600
Electronic shutter	1/2-1/8000
Photo resolution	8192*4608(48MP) 3840*2160(8MP)
Video resolution	UHD:3840*2160(4K)30fps
Maximum bit rate of video storage	100Mbps
Support file system format	Fat32 exFat
Image Format	JPEG & RAW
Video Format	MP4
Supports the memory card type	Maximum supports 128 GB Micro SD card, Fat32 format, transfer speed is Class10 or higher or UHS-1

WK-V8 Smart Voice Controller	
Operation Frequency	2.400-2.483GHz
Maximum communication distance	3~4km (Open, no shelter, no electromagnetic interference)
Display	1.54 inch LCD Screen Resolution: 240*240
Battery	3.7V 5000mAh 21700 LiPo
Maximum following speed	70km/h
Operating ambient temperature	-10℃ to +45℃
Charging ambient temperature	5℃ to 40℃

Down vision positioning	
Accurate ranging range	0.25m-5m
Hovering Accuracy Range	0.25m-10m



广州市华科尔科技股份有限公司

Guangzhou Walkera Technology Co.,Ltd

www.walkera.com

电话(Tel): +86 (20) 8491 5115 8491 5116

地址: 广州市南沙区东涌镇太石工业区万泰路48号

E-mail: info@walkera.com

Add: No.48 Wantai Rd, Taishi Industrial Park, Dongchong Town,
Nansha Dist, Guangzhou, China.511453



微信公众号



抖音号

*In order to continuously improve user satisfaction, the product will continue to be upgraded,
The actual product and promotional materials may be different, please refer to the final actual product.*

© 2023.06 WALKERA COPYRIGHT